

LUMINAIRE SCHEDULE									
SYMBOL	LABEL	QUANTITY	MANUFACTURER	CATALOG NUMBER	DESCRIPTION	FILENAME	LUMENS PER Lamp	LIGHT LOSS FACTOR	WATTAGE
☐	A	2	LITHONIA LIGHTING	RSX1 LED P1 30K R5	RSX Area Fixture Size 1 P1 Lumen Package 3000K CCT Type R5 Distribution	RSX1 LED P1 30K R5.ies	6631	0.85	51.34
☐	B	4	LITHONIA LIGHTING	RSX1 LED P3 30K R5	RSX Area Fixture Size 1 P3 Lumen Package 3000K CCT Type R5 Distribution	RSX1 LED P3 30K R5.ies	13103	0.85	109.44
☐	C	2	LITHONIA LIGHTING	RSX1 LED P1 30K R2 EGFV	RSX Area Luminaire Size 1 P1 Lumen Package 3000K CCT Type R2 Distribution with EGFV Shield	RSX1 LED P1 30K R2 EGFV.ies	3925	0.85	51.3435
☐	D	10	LITHONIA LIGHTING	WDGE2 LED P1 30K 80CRI T3M	WDGE2 LED WITH P1 - PERFORMANCE PACKAGE, 3000K, 80CRI, TYPE 3 MEDIUM OPTIC	WDGE2 LED P1 30K 80CRI T3M.ies	1205	0.85	11.1658
☐	E	5	LITHONIA LIGHTING	DSXB LED 12C 700 30K ASY	D-SERIES BOLLARD WITH 12 3000K LEDES OPERATED AT 700mA AND ASYMMETRIC DISTRIBUTION	DSXB LED 12C 700 30K ASY (1).ies	2173	0.85	31
20-FOOT POLE	DIRECT BURIED TAPERED COMPOSITE POLE, 4-FEET BURIAL DEPTH, HAND HOLE AT +18" ABOVE FINISHED GRADE, MOUNTING HEIGHT 20- FEET ABOVE FINISHED GRADE, VERIFY TENON ADAPTER FOR LUMINAIRE PRIOR TO PURCHASE, VERIFY FINISH WITH ARCHITECT PRIOR TO PURCHASE. MANUFACTURER: SHAKESPEARE S-SERIES OR APPROVED.								



PHOTOMETRIC STATISTICS						
DESCRIPTION	SYMBOL	AVG	MAX	MIN	MAX/MIN	AVG/MIN
PARKING LOT	+	1.2 FC	4.3 FC	0.2 FC	21.5:1	6.0:1
TRESPASS WEST	+	0.3 FC	0.5 FC	0.0 FC	N/A	N/A
TRESPASS WEST	+	0.3 FC	0.5 FC	0.2 FC	2.5:1	1.5:1
N. SIDEWALK	+	3.1 FC	31.9 FC	0.6 FC	53.2:1	5.2:1
S. SIDEWALK	+	1.9 FC	2.5 FC	1.2 FC	2:1	1.6:1

GENERAL NOTES


- A. ALL EXTERIOR WALL MOUNTED LUMINAIRES ARE MOUNTED AT +10- FEET ABOVE FINISHED GRADE.
- B. ALL POLE MOUNTED AREA LUMINAIRES ARE MOUNTED AT +20- FEET ABOVE FINISHED GRADE.
- B. INNER LUMINAIRE ISO CURVE INDICATES 1 FOOT CANDLE. OUTER LUMINAIRE ISO CURVE INDICATES 0.5 FOOT CANDLES.
- C. FOOT CANDLE ISO CURVES ARE SHOWN AS A SINGLE FIXTURE CONTRIBUTION WITH SET VALUES. THE ISO CURVE VALUES MAY NOT MATCH THE CALCULATION PLANE POINT VALUES BECAUSE THE CALCULATION PLAN CAN BE A CONTRIBUTION FROM MORE THAN ONE LUMINAIRE.

Exhibit 3.09

Received
Planning Division
4/11/2024

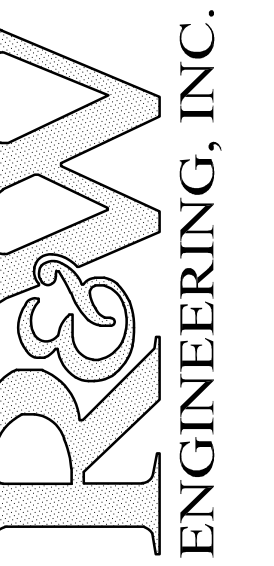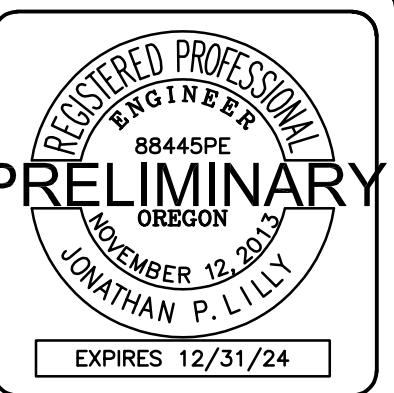


R&W ENGINEERING, INC.
"Engineering Integrated Solutions"
9815 S.W. Allen Blvd., Suite 101
Beaverton, Oregon 97005
Phone: (503) 726-3317
Fax: (503) 726-3326
E-mail: rveng@rweng.com

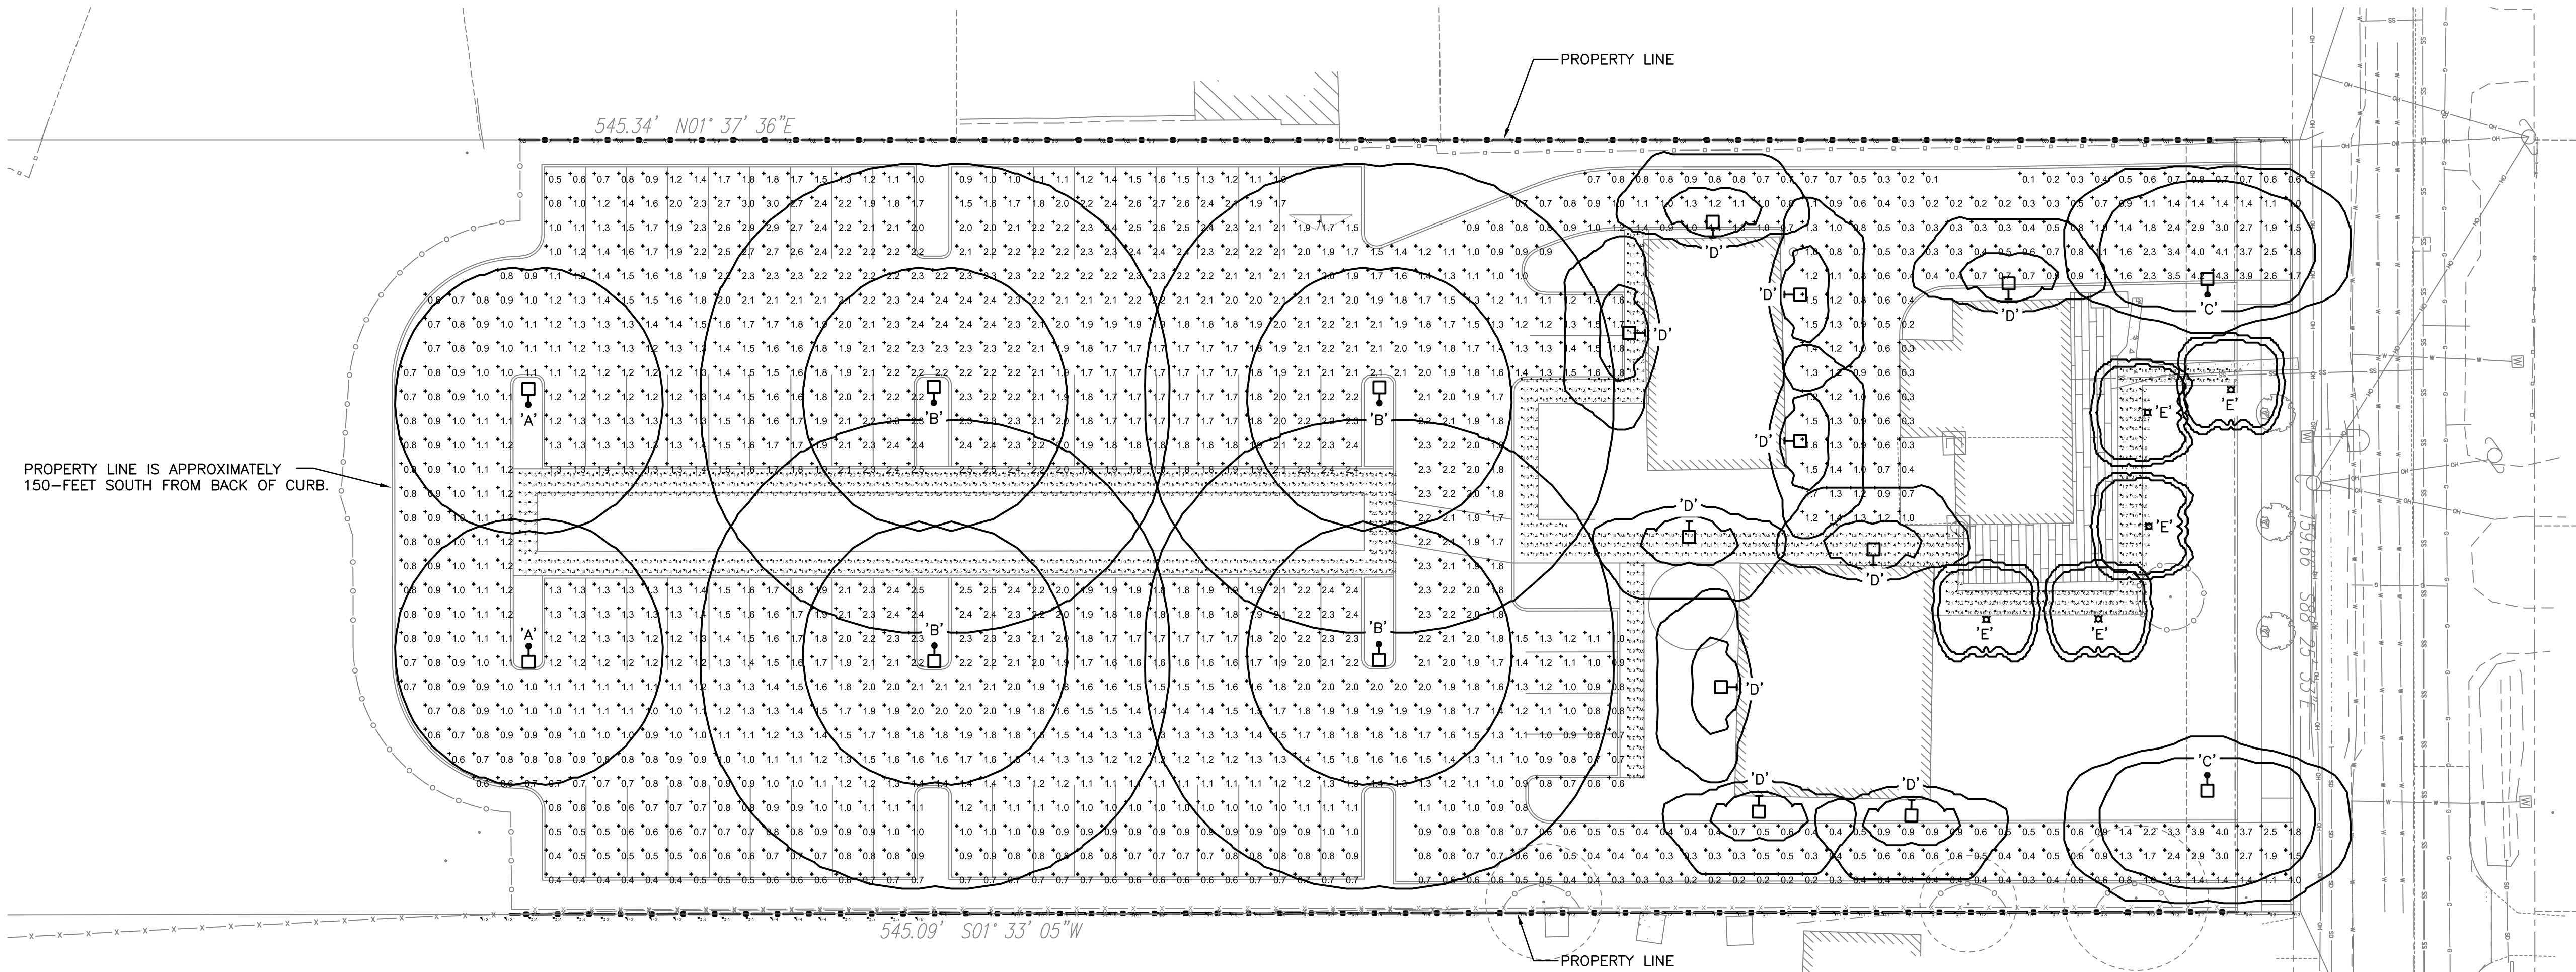

PROPERTY LINE IS APPROXIMATELY 150- FEET SOUTH FROM BACK OF CURB.

1 SITE PLAN - PHOTOMETRIC
E1.0 SCALE: 1" = 30'-0"



SCALE IN FEET
1" = 30'-0"

THIS LINE IS 2 INCHES AT FULL SCALE
IF IT DOES NOT MEASURE 2 INCHES, SCALE ACCORDINGLY

REV	DATE	DESCRIPTION

**SIKH CENTER OF OREGON
BEAVERTON, OREGON**
SITE PLAN -
PHOTOMETRIC

DESIGNED: DDH
DRAWN: R&W
CONTACT: DDH
PROJECT #: 1778.001.001
DATE: 03/22/2024

DRAWING NO.
E1.0
SHEET 2 OF 2



D-Series LED Bollard



d#series

Specifications

Diameter: 8" Round
(20.3 cm)

Height: 42"
(106.7 cm)

Weight (max): 27 lbs
(12.25 kg)



Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series LED Bollard is a stylish, energy-saving, long-life solution designed to perform the way a bollard should—with zero uplift. An optical leap forward, this full cut-off luminaire will meet the most stringent of lighting codes. The D-Series LED Bollard's rugged construction, durable finish and long-lasting LEDs will provide years of maintenance-free service.

Ordering Information

EXAMPLE: DSXB LED 16C 700 40K SYM MVOLT DDBXD

DSXB LED												
Series	LEDs	Drive current		Color temperature		Distribution		Voltage	Control options	Other options	Finish <i>(required)</i>	
DSXB LED	Asymmetric 12C 12 LEDs ¹	350	350 mA	30K	3000 K	ASY	Asymmetric ¹	MVOLT ⁵	Shipped installed PE Photoelectric cell, button type DMG 00-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ELCW Emergency battery backup ⁶	Shipped installed SF Single fuse (120, 277, 347V) ^{4,7} DF Double fuse (208, 240V) ^{4,7} H24 24" overall height H30 30" overall height H36 36" overall height FG Ground-fault festoon outlet L/AB Without anchor bolts L/AB4 4-bolt retrofit base without anchor bolts ⁸	DWHXD	White
		450	450 mA ^{3,4}	40K	4000 K	SYM	Symmetric ²	120 ⁵			DNAXD	Natural aluminum
	530	530 mA	50K	5000 K			208 ⁵	DDBXD			Dark bronze	
	700	700 mA	AMBPC	Amber phosphor converted			240 ⁵	DBLXD			Black	
	Symmetric 16C 16 LEDs ²			AMBLW	Amber limited wavelength ^{3,4}			277 ⁵			DDBTXD	Textured dark bronze
							347 ⁴	DBLBXD	Textured black	DNATXD	Textured natural aluminum	
											DWHGXD	Textured white

Accessories

Ordered and shipped separately.

MRAB U Anchor bolts for DSXB⁸

NOTES

- Only available in the 12C, ASY version.
- Only available in the 16C, SYM version.
- Only available with 450 AMBLW version.
- Not available with ELCW.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Not available with 347V. Not available with fusing. Not available with 450 AMBLW.
- Single fuse (SF) requires 120, 277, or 347 voltage option. Double fuse (DF) requires 208 or 240 voltage option.
- MRAB U not available with L/AB4 option.

Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%.

Light Engines	Drive Current	System Watts	3000 K					4000 K					5000 K					Limited Wavelength Amber					
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	
Asymmetric (12 LEDs)	350	16	1,194	75	1	0	1	1,283	80	1	0	1	1,291	81	1	0	1						
	530	22	1,719	78	1	0	1	1,847	84	1	0	1	1,859	85	1	0	1						
	700	31	2,173	70	1	0	1	2,335	75	1	0	1	2,349	76	1	0	1						
	Amber 450	16																348	22	1	0	1	
Symmetric (16 LEDs)	350	20	1,558	78	1	0	0	1,674	84	1	0	0	1,685	84	1	0	0						
	530	28	2,232	80	2	0	1	2,397	86	2	0	1	2,412	86	2	0	1						
	700	39	2,802	72	2	0	1	3,009	77	2	0	1	3,028	78	2	0	1						
	Amber 450	20																419	21	1	0	1	

Note: Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.00	0.98	0.97	0.95


Electrical Load

Light Engines	Drive Current (mA)	System Watts	Current (A)				
			120	208	240	277	347
12C	350	16W	0.158	0.118	0.114	0.109	0.105
	530	22W	0.217	0.146	0.136	0.128	0.118
	700	31W	0.296	0.185	0.168	0.153	0.139
	Amber 450	16W	0.161	0.120	0.115	0.110	0.106
16C	350	20W	0.197	0.137	0.128	0.121	0.114
	530	28W	0.282	0.178	0.162	0.148	0.135
	700	39W	0.385	0.231	0.207	0.185	0.163
	Amber 450	20W	0.199	0.139	0.130	0.123	0.116

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Bollard homepage](#).

Isfootcandle plots for the DSXB LED 700 40K. Distances are in units of mounting height (3').

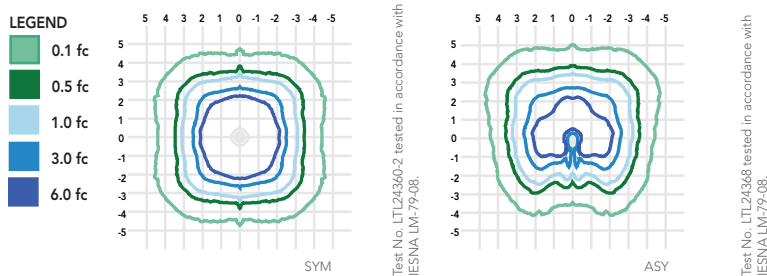

FEATURES & SPECIFICATIONS

INTENDED USE

The rugged construction and maintenance-free performance of the D-Series LED Bollard is ideal for illuminating building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

CONSTRUCTION

One-piece 8-inch-round extruded aluminum shaft with thick side walls for extreme durability, and die-cast aluminum reflector and top cap. Die-cast aluminum mounting ring allows for easy leveling even in uneven areas and full 360-degree rotation for precise alignment during installation. Three 1/2" x 11" anchor bolts with double nuts and washers and 3-5/8" max. bolt circle template ensure stability. Overall height is 42" standard.

FINISH

Exterior parts are protected by a zinc-infused super durable TGIC theroset powder coat finish that provides superior resistance to corrosion and weathering for maximum retention of gloss and luster. A tightly controlled multi-stage process ensures a minimum 3-mil thickness for a finish that can withstand the elements without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Two 0% uplight optical distributions are available: symmetrical and asymmetrical. IP66 sealed LED light engine provides smoothly graduated illumination without uplight. Light engines are available in standard 4000 K (>70 CRI) or optional 3000 K (>80 CRI) or 5000 K (67 CRI). Limited-wavelength amber LEDs are also available.

ELECTRICAL

Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (L95/100,000 hours at 700mA at 25°C). Class 2 electronic drivers are designed for an expected life of 100,000 hours with < 1% failure rate. Electrical components are mounted on a removable power tray.

LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated. Rated for -40°C minimum ambient. Cold-weather emergency battery backup rated for -20°C minimum ambient.

BUY AMERICAN ACT

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

Five-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

